

LK-RS00X Rain Sensor



LK-RS001

LK-RS002

Feature

- The casing is resistant to ultraviolet radiation and is suitable for outdoor use
- The induction panel is gold-plated and has strong oxidation resistance, is with 45 degree design for being drying easily
- Made by low-power and high-speed CMOS technology
- Strong anti-interference ability
- Wireless signal can pass through walls, floors and doors
- Paired with LinkAYL receiver


Ordering code

Model	Wiring	Vin	Frequency	Battery	Dimension
LK-RS001	Wired	12-24VDC			100*50*33mm
LK-RS002	Wireless	9VDC	433.92MHz	6F22 9V	100*50*33mm


Operation description

- Matching code: Power controller on, press STOP on the controller for 5 seconds, press KEY on the sensor in 15 seconds, LED flashes 3 times, codes are matched
- Clearing code: Power controller on, press STOP on the controller for 5 seconds, touch the sensor panel in 15 seconds, LED flashes 3 times, code is cleared

Installation

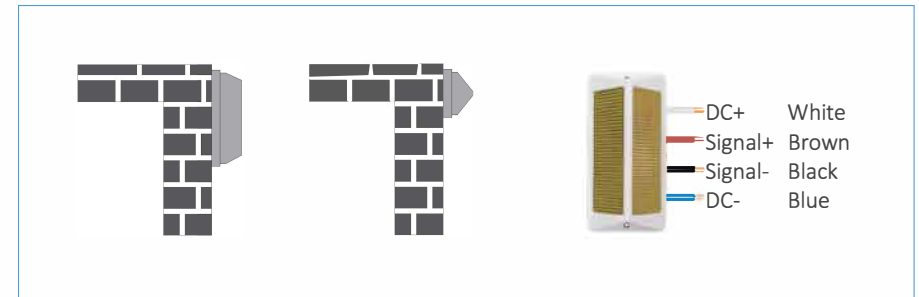

Solution

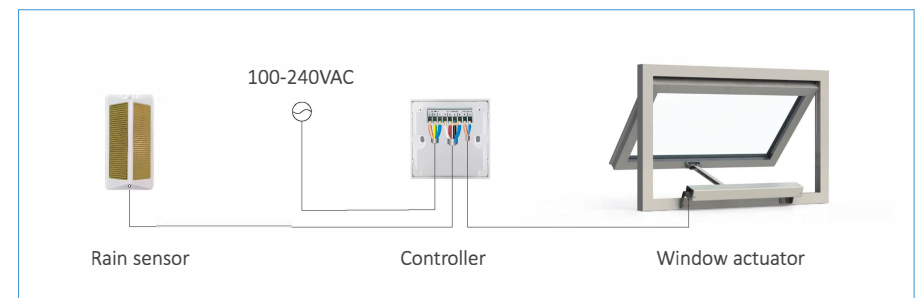

Replacing Battery

- Use a screwdriver to open the bottom cover, remove the old battery, install a new one, and re-tighten the cover
- Please put the used battery in the appointed place